


FLUFFO

Mounting instructions of the
FLUFFO FRAME large-format
acoustic panels

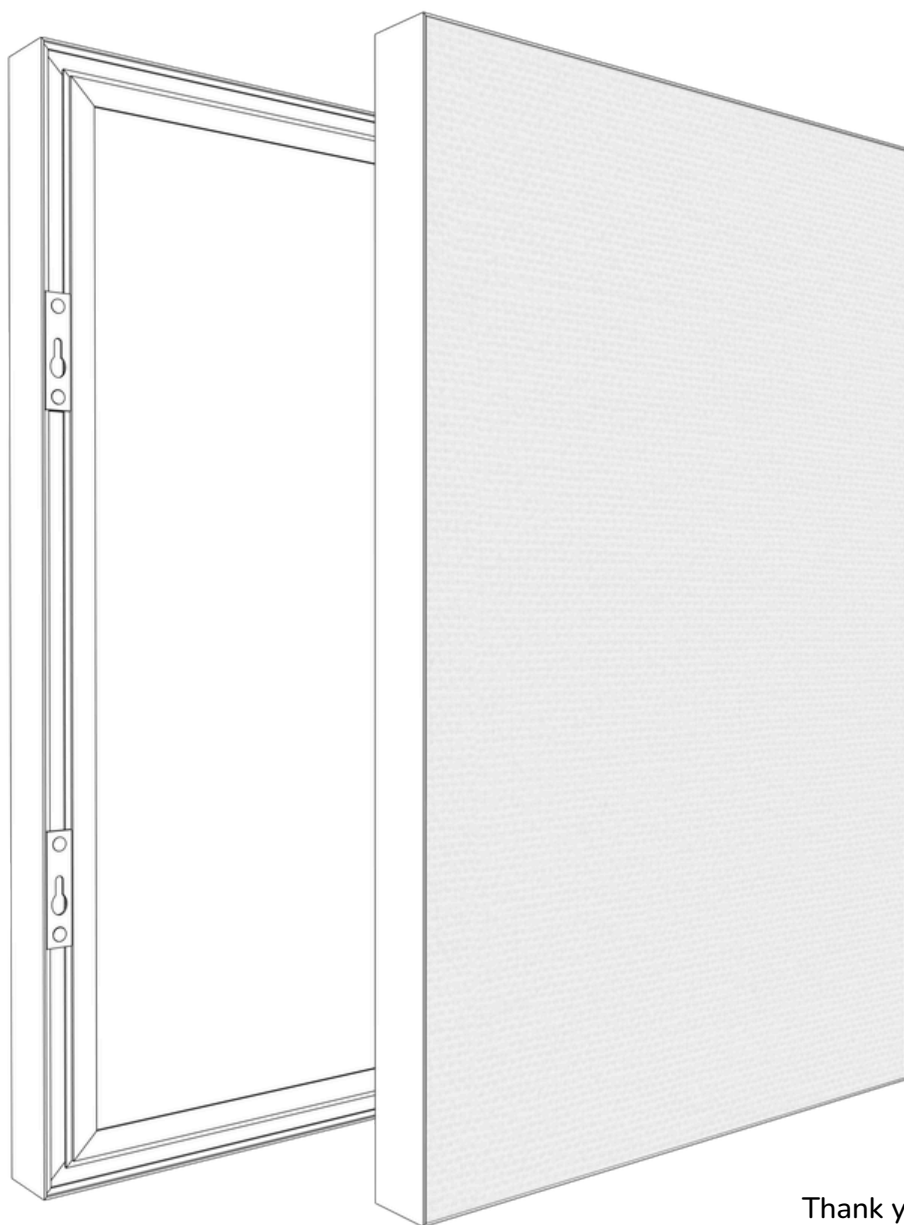

Thank you for choosing
Fluffo FRAME acoustic panels.

1 to 2 persons are needed to install the panels
(depending on the size of the panels being installed).

Please follow these instructions.
Should you need our help at any stage
of the installation, please contact us:

www.fluffo.pl

+48 502 552 392

DIRECTIONS FOR USE:



The panels should be installed away from open flames, sparks and other heat sources such as air conditioners or heaters.



The external components of the panels (the fabric and aluminium frame) are susceptible to mechanical damage. Be careful not to damage them with sharp tools during installation.



Avoid staining the decorative fabric.



The hangers can only be adjusted once the panel has been removed from the wall.

CLEANING AND CARE INSTRUCTIONS:



Dust can settle on the panels just as it does on any other furniture. In order to remove dust from aluminium surfaces, use a soft-bristled dusting brush or a soft, dry cloth. To remove dust from fabric, use a soft-bristled brush or a vacuum cleaner with a standard brush for upholstered furniture.



Lightweight stains from the surface of the fabric can be removed with a soft sponge slightly moistened with diluted detergent. When cleaning please wipe the whole panel surface, so that you don't leave rubbing traces in one spot. Wipe aluminium surfaces with a damp cloth.










Be sure not to over rub the panel surface with a wet sponge and avoid strong detergents, such as bleach or washing powder.

The above information is based on our best knowledge and is provided as guidance only. We are happy to provide any information and technical advice regarding our products, whilst reserving the right to make changes in our offer at any time. It is the responsibility of the recipient to verify and decide whether the technical characteristics of our products are suitable for their intended purpose. We accept no liability for consequences arising from failure to follow Fluffo's usage recommendations.

1 Preparation for installation

Before beginning the installation process, make sure you have the following tools and accessories:

- A Fluffo FRAME panels
- B Wall plugs and wall hooks (included with the panels)
- C Measuring tape
- D Pencil
- E Level tool
- F Power drill
- G Screwdriver for hangers adjustment



Should you need our help at any stage of the installation please call:

+48 502 552 392

2 Panel preparation

The Fluffo FRAME panel is mounted on the wall using four hooks. The panel is supplied with fittings for vertical installation as standard; however, it can also be installed horizontally.

For horizontal installation, the hanger plates should be unscrewed from the side mounting rails and installed in the top and bottom frame rails. These rails are equipped with factory-fitted retaining clips designed to accommodate the hanger plates.


Please note that the retaining clips are permanently integrated into the rails and are not removable.

Before installation, remove the protective film from the aluminium frame.


Place the panel face down and examine the mounting system. The rear side of the frame is fitted with four hanger brackets, with two brackets located on each of the parallel sides. Each bracket features three mounting holes:

- Two of the holes are fitted with screws. Each screw passes through the hanger plate and into a retaining clip seated within the frame rail. When tightened, the screw draws the hanger plate and retaining clip together, securely clamping them to the frame.
- One keyhole-shaped slot is provided for hanging the panel on a wall hook.

Insert the hook from below into the wider part of the keyhole slot, then slide the panel downward until the hook is securely seated in the narrow section of the slot.

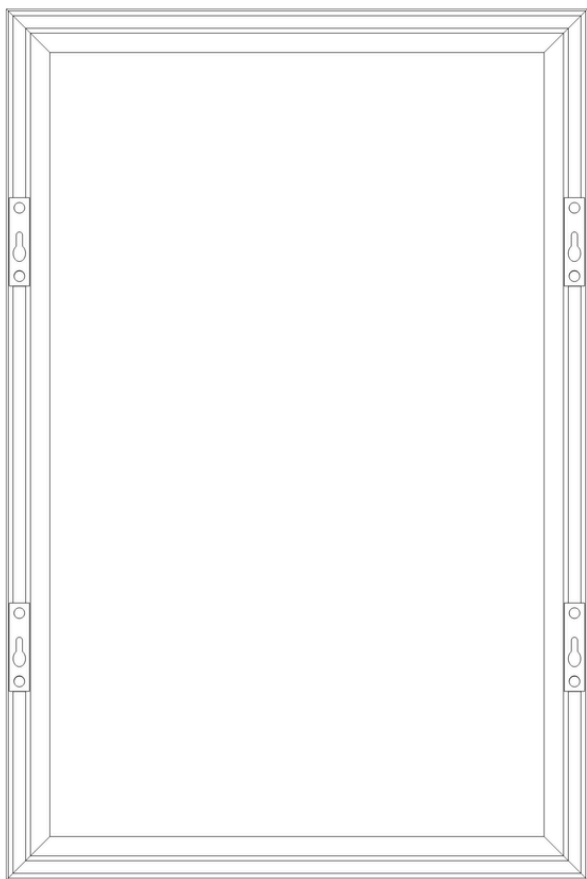

*Rear view of the panel
(vertical installation – mounting hanger brackets
on the sides)*

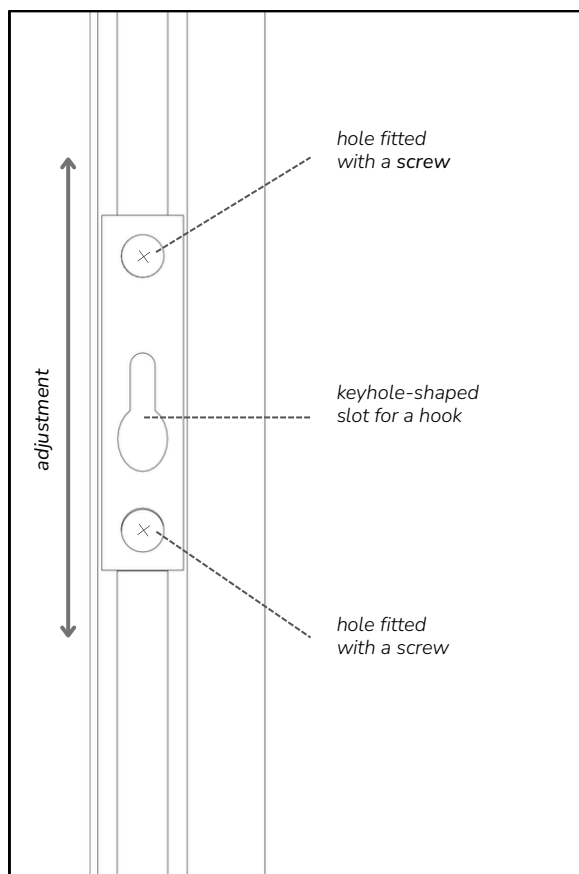


*A close-up of the hanger showing the keyhole-
shaped slot and two holes fitted with screws used to
attach the hanger plate to the frame*

3 Hanger adjustment

The hangers are pre-set at the factory for vertical wall mounting of the panel. If you wish to change their position along the frame rail, follow these steps:

1. Loosen the screws in both the upper and lower holes of the hanger using a screwdriver. The screws connect the hanger plate to the retaining clip inside the rail. Do not remove the screws completely.
2. Slide the hanger along the frame rail to the desired position.
3. Retighten the screws until the hanger is securely fixed in place and cannot move.

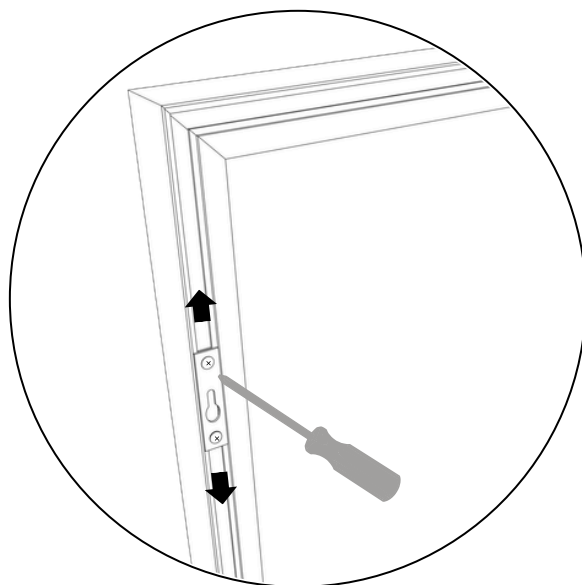


To change the panel orientation from vertical to horizontal, completely remove the screws and detach the hanger plates from the side rails. Then install them in the rails on the top and bottom sides of the frame, fastening the screws into the retaining clips already positioned within those rails

4 Measuring and marking the mounting points

This is the most critical step – **precise measurement is key to ensuring the panel is mounted correctly.**

Turn the panel face down and carefully measure the following:

- The horizontal distance between the centres of the keyhole slots in the left and right hangers (**dimension A**).
- The vertical distance between the centres of the keyhole slots in the upper and lower hangers (**dimension B**).
- The vertical distance between the centres of the keyhole slots in the upper hangers and the top edge of the panel (**dimension C**).

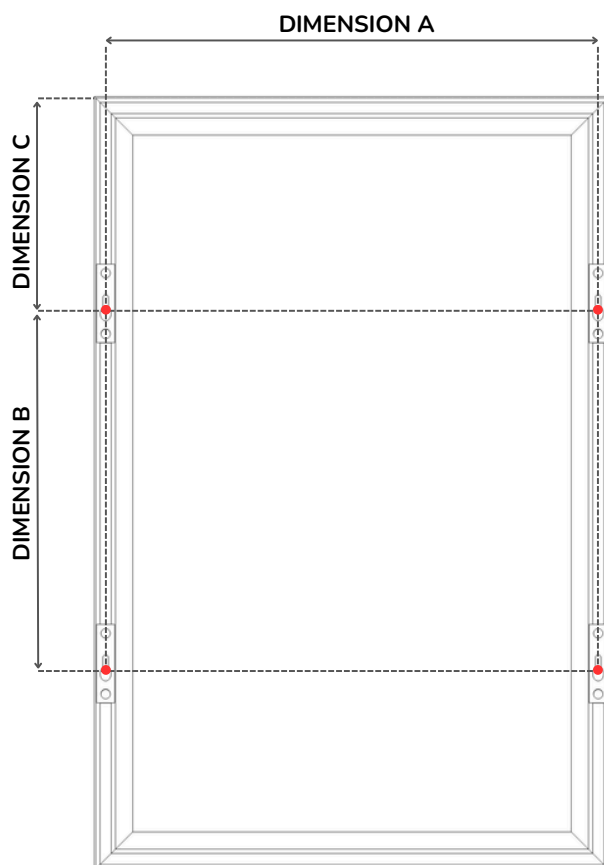


4 Measuring and marking the mounting points

Plan the panel's position on the wall. You may use a pencil to mark the outline of the panel.

Transfer the measured dimensions A, B, and C onto the wall and mark the four mounting points with a pencil. Use a spirit level to ensure that the two upper points are perfectly level.

CAUTION! Before drilling any holes in the wall, double-check all measurements to ensure accuracy.

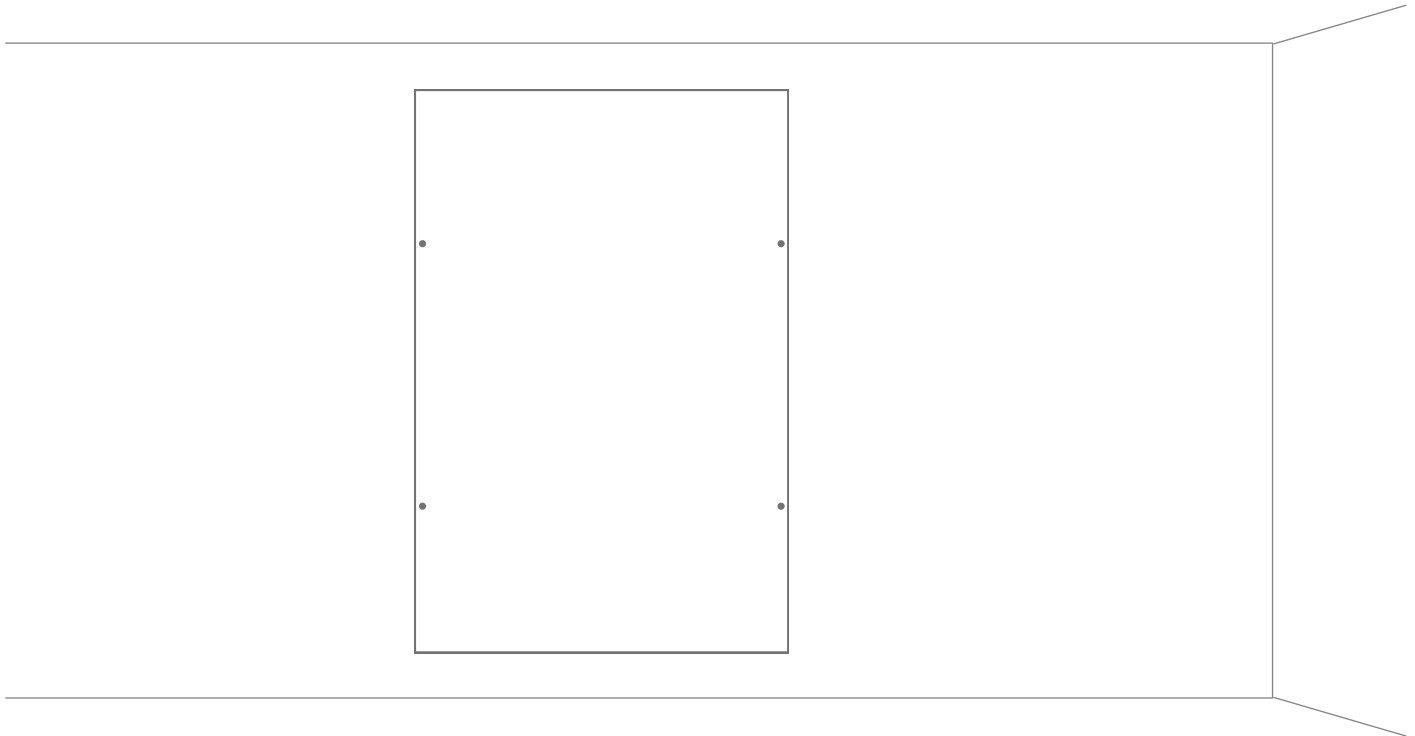

5 Installing the mounting hooks and hanging the panel

Drill holes at the four marked mounting points. Insert the wall plugs and screw in the wall hooks. Make sure that each hook protrudes from the wall by the same distance and is securely fastened.

Lift the panel and align the keyhole openings with the wall hooks. The hooks should enter through the wider lower part of the keyhole openings. Then gently slide the panel downward – the hooks will move into the narrower section of the keyhole-shaped slots, locking the panel in place.

Use a level tool to ensure that the panel is hanging straight. If necessary, remove the panel and adjust the hanger positions as described in Step 3.

Check that the panel is securely mounted and does not move. Ensure that the frame sits evenly against the wall along its entire perimeter.

5 Installing the hooks and hanging the panel

CAUTION! If you are planning to install multiple panels on the same wall, we recommend leaving a gap of at least 2–2.5 cm (0.8–1 in.) between adjacent panels.

